



PREMIER LINEAR HIGHBAY G4

10KV SURGE PROTECTION**166LM/W**

FEATURES

The Toblo Bay combines robust performance with economical design, packing much of the punch of its more luxurious counterparts without unnecessary frills. A true no-nonsense workhorse. Engineered to light where you need it most, a perfect blend of strength and affordability. Featuring a substantial lumen output and a choice of six optics, delivering robust illumination from significant heights.



PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 51 447 0020

HEAD OFFICE: Corner Darling & Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>

**EFFICIENCY**

166 lm/w

**Ra (CRI)**

>80

**PF**

0.98

**IP RATING**





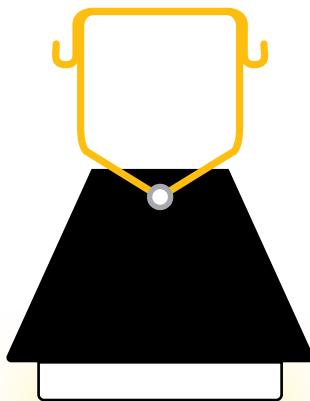
IP20

**LIFETIME**L80/90 B10
50 000 hrs**COLOUR
TEMP**3000K, 4000K
5000K**ADDITIONAL INFORMATION:**


- Operating temperature: 35°C minimum.
- Driver & LED vender: Tridonic Driver, TCI LEDs
- Casambi Bluetooth® Technology
- Earth connection and CLASS 1 insulation fixture
- VOLTpro® compatible
- All units are serviceable and all parts replaceable.

MATERIAL:

- Structure: Aluminium
- Category: 6063 T3 Corrosion Resistant
- Finish: Powder Coated
- Lens: Acrylic
- Fixture colour: Black

LIGHT DISTRIBUTION OPTIONS30°
High Ceilings90°
Medium High Ceilings30°
Open Areas60°
General Lighting**INSTALLATION OPTIONS:****P2000 Claw Mount - Standard**

For quick and simple attachment of the TOBLO Bay to P2000 trunking.

**Suspended Shackle Mount**

For hanging the fitting at your desired height.
On request.

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 51 447 0020

HEAD OFFICE: Corner Darling & Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

SPECIFICATIONS:

LUMINAIRE	LUMINAIRE WATTAGE	LUMINAIRE LENGTH (mm)	LUMINAIRE LED mA	LUMINAIRE EFFECTIVE LUMEN
DL-LHBG4-102	115W - 123W	600	800mA - 900mA	18,150 lm - 20,400 lm
DL-LHBG4-103	159W - 185W	1000	750mA - 900mA	26,500 lm - 30,600 lm
DL-LHBG4-104	246W	1350	900mA	40,800 lm

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 51 447 0020

HEAD OFFICE: Corner Darling & Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>