



ESSENTIAL LED DOWNLIGHT

RECESSED & SURFACE

1.5kV SURGE PROTECTION**3CCT**

FEATURES:

- Instant light – Flicker free
- 3 CCT selectable: 3000k, 4000k, 6500k
- NO harmful UV & IR radiations
- 1.5kv surge protection
- Working temp. -20° + 40°C
- Large operating voltage 170 - 260V
- Full PVC-housing and surface bracket
- IP20
- RA >80



APPLICATIONS:

- Offices
- Airports
- Food industry
- Educational Buildings
- Commercial
- Retail

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & 1 Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za



LED DOWNLIGHT

RECESSED & SURFACE

1.5kV SURGE PROTECTION

3CCT

	Product Code	System Power (W)	Nominal Voltage (V)	Colour Temp	System Lumens (Lm)	Colour of Fixture
RECESSED	DLDL06	5W	170-260V	3000k/4000k/6500k	450	White
	DLDL07	9W	170-260V	3000k/4000k/6500k	850	White
	DLDL13	12W	170-260V	3000k/4000k/6500k	1150	White
	DLDL21	18W	170-260V	3000k/4000k/6500k	1600	White
	DLDL29	22W	170-260V	3000k/4000k/6500k	2000	White
SURFACE	DLDL45	12W	170-260V	3000k/4000k/6500k	1150	White
	DLDL55	18W	170-260V	3000k/4000k/6500k	1600	White
	DLDL57	22W	170-260V	3000k/4000k/6500k	2000	White



PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & 1 Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>



LED DOWNLIGHT



RECESSED & SURFACE

1.5kV SURGE PROTECTION

3CCT

	Product Code	System Power (W)	Other Diameter (mm)	Height	Cut out (mm)
RECESSED	DLDL06	5W	95	25	75-90
	DLDL07	9W	120	25	90-110
	DLDL13	12W	145	25	120-130
	DLDL21	18W	170	28	140-150
	DLDL29	22W	170-260V	28	190-200
SURFACE	DLDL45	12W	170-260V	32	SURFACE
	DLDL55	18W	170-260V	34	SURFACE
	DLDL57	22W	170-260V	34	SURFACE

TECHNICAL DRAWING:

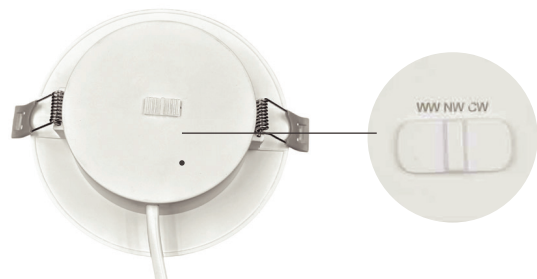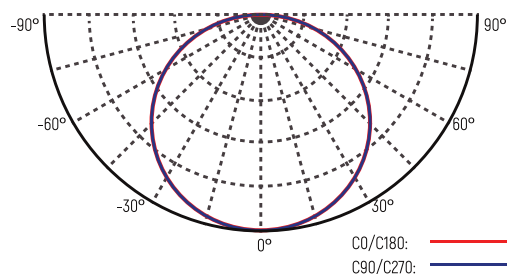

SHARED SPECS



Ra (CRI)

>80



ANGLE

120°



PF

>0.5



LIFETIME

25000hrs



IP RATING

IP20