



PREMIER POWER 3 LINEAR

LED HIGHBAY-DIMMABLE
150W/200W/240W

DIMMING CONTROL

LINKABLE



FEATURES:

- 160 lumens per watt: see technical data for lumen outputs •
- 3 Wattages in 1 highbay - 150w/200w/240w - Selectable Power output via dip switch
- 3 Kelvin in 1 highbay – 4000k / 5000k / 5700k – Selectable Power output via dip switch
- Single highbay for numerous uses
- Philips LED chips
- 50 000 hour lifetime (L80B50)
- 50% less power consumption than traditional light sources
- The ripple-like lens cover diffuses the dazzling light generated by individual leds and shed a gentle beam creating a harmonious lighting environment
- IES files are available
- Surface / Suspension mount
- Ideal for Warehouse Isles / Racking
- 3-in-1 Wattage
- 3-in-1 Kelvin



PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>



TECHNICAL DATA:


PRODUCT CODE	LUMINAIRE WATTAGE	INPUT VOLTAGE	BEAM ANGLES	COLOUR TEMP	LUMENS	DIMENSIONS L x B x H	WEIGHT
DLLHB1524	150W	180-264v	90° BEAM	4000k 5000k 5700k	24 000	1 060*101*65mm	3.1 KG
DLLHB1524	200w	180-264v	90° BEAM	4000k 5000k 5700k	32 000	1 060*101*65mm	3.1 KG
DLLHB1524	240w	180-264v	90° BEAM	4000k 5000k 5700k	38 400	1 060*101*65mm	3.1 KG

SHARED SPECS

EFFICIENCY 160lm/w	Ra (CRI) >80	PF 0.95	IP RATING IP65	LIFETIME 50 000 HRS	COLOUR TEMP 4000k 5000k 5700k

ADDITIONAL INFORMATION:

- Philips Lumileds
- Operating temperature range: -30°C to 40°C
- Smart control options: Occupancy sensor | Daylight sensor | Dali
- Lens polycarbonate
- Mounting options: Suspended | Surface Mount
- Tri Pole: 6Kv Surge Protection
- UGR: Low Glare Rating
- Push Connect terminals with through wiring - Linkable * Must use min 3 * 1.5mm Cable for linking*
- 90°x60° beam angle optional

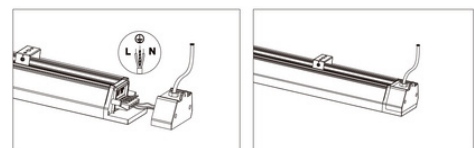

MATERIAL:

- Structure: Extruded Aluminium with Die casting ADC12 end Caps
- Finish: Sand blasted, anodized and powder-coated black
- Lens: Polycarbonate

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>