



ESSENTIAL LED CEILING LIGHT

1.5KV SURGE PROTECTION**3 CCT****FEATURES:**


- Slim Profile
- 3CCT – Selectable via dip switch
- 3000k/4000k/6500k
- Replaceable light source
- PMMA Cover
- Ceiling or wall mount

APPLICATIONS:

- Residential
- Commercial

MATERIAL:

- Base – Iron Powder coated
- COVER / Diffuser – PMMA

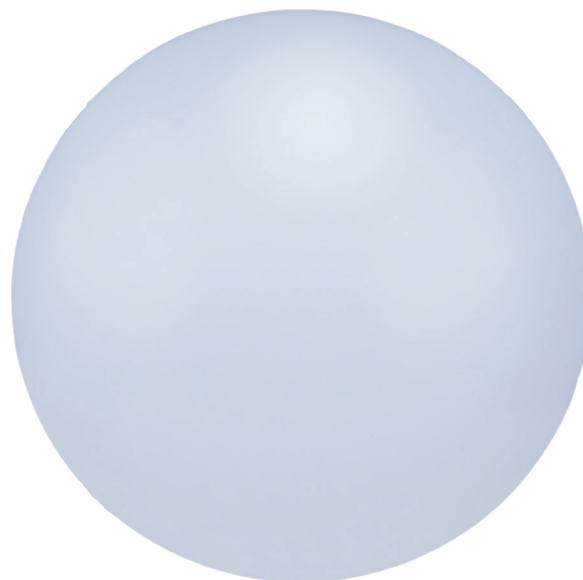

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & 1 Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za



TECHNICAL DATA:

Product Code	Rated Power	IP	Lamp Size(mm)	Voltage	CCT	Lumens (lm)	C.R.I	PF	Surge Protection	Dimmable
DLCL03	12W	20	260*50mm	185-264V	6000K	1200	80	0.5	1.5KV	NO
DLCL05	12W	20	260*50mm	185-264V	3000K 4000K 6500K	1200	80	0.5	1.5KV	NO
DLCL08	18w	20	330*60mm	185-264V	6500K	1700	80	0.5	1.5KV	NO
DLCL10	18W	20	330*60mm	185-264V	3000K 4000K 6500K	1700	80	0.5	1.5KV	NO
DLCL13	24W	20	380*60mm	185-264V	6500K	2240	80	0.5	1.5KV	NO
DLCL15	24W	20	380*60mm	185-264V	3000K 4000K 6500K	2240	80	0.5	1.5KV	NO

PORT ELIZABETH
T: +27 41 484 3330

CAPE TOWN
T: +27 21 551 2400

DURBAN
T: +27 31 700 0055

JOHANNESBURG
T: +27 31 700 0055

BLOEMFONTEIN
T: +27 41 484 3330

HEAD OFFICE: Corner Darling & 1 Delson Street, North End, Port Elizabeth, South Africa

www.daylight.co.za

*See product warranty terms and conditions at <https://daylight.co.za/warranty-terms-and-conditions/>